

NEW CAMSO
ATV R4S



ALL-TERRAIN

Get greater access for less

An all-season ATV track system designed for small machines. Whatever your way to play — ice fishing, hunting, farming, getting to the cabin — the ATV R4S is the perfect track system to take your ATV further than ever before, for less.

MACHINE
300cc TO 500cc



SPROCKETS

Adapted for smaller-bore ATVs

- Adjusted to prevent clutch and engine overload

LIGHTWEIGHT POWDER COAT STEEL FRAME

Optimized geometry

- Overall good performance and handling

RUBBERIZED AND SEALED MID-ROLLERS

Increased wheel bearing longevity

- Prevent ice accumulation during winter use

8" TRACK WIDTH

Specially adapted for small cc ATVs

- Ground pressure reduced by 50% vs. tires



CENTERED RUBBERIZED DOUBLE-BEARING IDLER WHEELS

High impact resistance

- Prevent ice accumulation during winter use

THE RIGHT ATV TRACK SYSTEM FOR YOU

YOUR VEHICLE TYPE

SMALL VEHICLES



CAMSO
ATV R4S

MACHINE
**300^{CC} TO
500^{CC}**

ALL VEHICLES




CAMSO
ATV T4S

MACHINE
**300^{CC} TO
1000^{CC}**


YOUR USAGE

Whether you use your vehicle for hard work or recreational purposes, we've got the system to fit your needs.

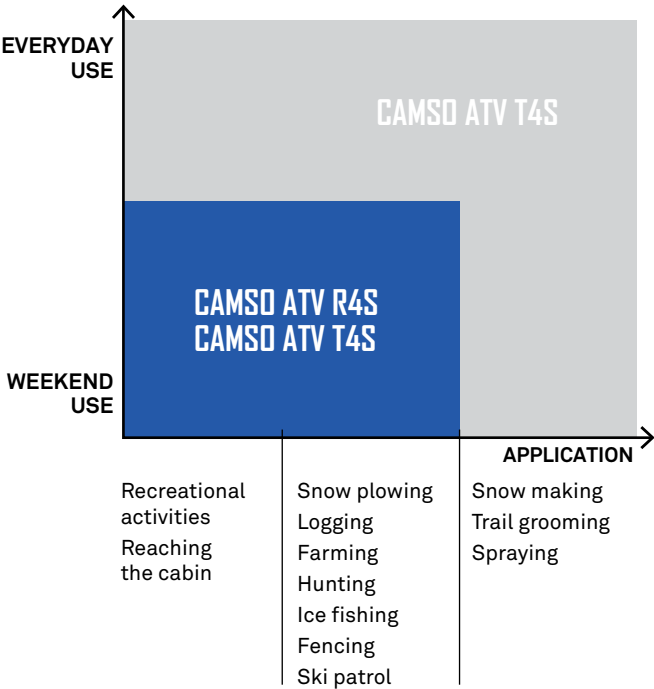

YOUR TRACTION NEEDS

Do you carry big loads on steep terrain? Or smaller loads on flat land? We've got two ATV track systems to maximize your vehicle's traction and allow you to go anywhere, and carry anything depending on your needs.

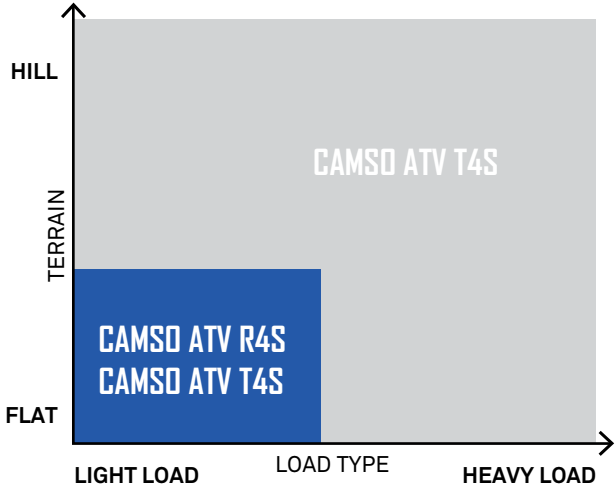

YOUR FLOTATION NEEDS

Depending on your machine's size, choosing the right system allows you better flotation.

Ground pressure matters when it comes to gaining traction and speed with your vehicle.



	ATV R4S	ATV T4S
VEHICLE WEIGHT	573 lb	573 lb
SYSTEM GROUND SURFACE	1333 in²	2000 in²
	0.42 lb /in²	0.28 lb /in²



	ATV T4S
VEHICLE WEIGHT	886 lb
SYSTEM GROUND SURFACE	2000 in²
	0.44 lb /in²

SERVICE WHEN AND WHERE YOU NEED IT

Camso’s technical expertise and service are second to none. Wherever in the world you’re located, access a Camso expert through one of our many dealers, distributors, or through our direct assistance line. We’re ready to respond to every question or need.

2-year limited warranty

Camso track systems are covered by a best-in-class two-year limited warranty.

1-866-533-0008 (USA and Canada only)
enduser.atv@camso.co



TECHNICAL SPECIFICATIONS

SYSTEM		CAMSO ATV R4S	CAMSO ATV T4S	CAMSO UTV 4S1
Machine size		300 cc to 500 cc	300 cc to 1000 cc	400 cc to 1000 cc
1	Offset (length)	Front: 25 in (638 mm) Rear: 26 in (658 mm)	Front: 24 in (609 mm) Rear: 27 in (685 mm)	Front: 26.5 in (673 mm) Rear: 35 in (889 mm)
2	Offset (width)	5.5 in (140 mm)	6 in (153 mm)	7.25 in (184 mm)
Weight		60 lb (27 kg)	71 lb (30 kg)	Front: 103 lb (47 kg) Rear: 120 lb (54 kg)
Height		Front: 24 in (610 mm) Rear: 24 in (610 mm)	Front: 23.8 in (604 mm) Rear: 23.2 in (590 mm)	Front: 25 in (637 mm) Rear: 24.7 in (626 mm)
Length		Front: 40 in (1016 mm) Rear: 43 in (1092 mm)	Front: 40 in (1016 mm) Rear: 42.5 in (1081 mm)	Front: 42.5 in (1081 mm) Rear: 52 in (1321 mm)
Width		8.4 in (213 mm)	22 in (560 mm)	25 in (635 mm)
Mounting hardware weighth		Approx. 6.25 lb (2.75 kg)	Approx. 6.25 lb (2.75 kg)	Approx. 6.25 lb (2.75 kg)
RUBBER TRACK				
Width		Front: 8 in (203 mm) Rear: 8 in (203 mm)	Front: 11.5 in (292 mm) Rear: 12.5 in (318 mm)	Front: 12.5 in (318 mm) Rear: 14 in (356 mm)
Length		Front: 93.4 in (2372 mm) Rear: 98.6 in (2504 mm)	Front: 93.4 in (2372 mm) Rear: 98.5 in (2507 mm)	Front: 98.5 in (2507 mm) Rear: 116.7 in (2964 mm)
Lug height		Front: 7/8 in (22 mm) Rear: 1 in (25 mm)	Front: 1.25 (32 mm) Rear: 1.25 in (32 mm)	Front: 1.125 in (29 mm) Rear: 1.125 in (29 mm)
PERFORMANCE				
Ground surface		1 333 sq in (0.86 m²)	2000 sq in (1.30 m²)	2520 sq in (1.62 m²)
3	Ground clearance (average)	Increased by 3 ¼ in (83 mm)	Increased by 3 in (76 mm)	Increased by 5 in (127 mm)
Maintained speed (average)		2/3	2/3	2/3
SPECIFICATION				
Drive type		Internal drive	Internal drive	Internal drive
Sprocket		15 to 18 teeth	15 to 18 teeth	15 to 18 teeth
Rubber track		Front: Flat Rear: Flat	Front: Flex Rear: Flat	Front: Flex Rear: Flat
Frame		Carbon steel	Carbon steel	Carbon steel
Idler and mid-roller Wheels/Tire		134-mm double-bearing and sealed mid-roller wheels. Bladder-type wheel cap. 200-mm double-bearing.	134- and 202-mm encapsulated and sealed wheel including elastomer outer band. Bladder-type wheel cap.	132-mm double-bearing mid-roller wheels (width: 50 mm). 241-mm double-bearing flat-free tires. Bladder-type wheel cap and face seal.
Guide		Molded UHMW	Molded UHMW	Molded UHMW
Hub and bearing		Oiled 2-bearing with cast steel multi-bolt (4-5) pattern hub.	Cast steel multi-bolt (4) pattern hub.	Oiled 3-bearing with forged steel multi-bolt. (4-5) pattern hub.
Tandem and suspension		N/A	Mono front tandem on pivot point with bolted wheels.	Rubber mount steel tandem. Rubber mount aluminium shaft axle. Maintenance free.
Anti-rotation		Redesigned mild steel anti-rotation single-rate spring and progressive damper. Quick-connect steering limiter design.	Redesigned mild steel anti-rotation single-rate spring and progressive damper. Quick-connect steering limiter design.	Redesigned mild steel anti-rotation single-rate spring and progressive damper. Quick-connect steering limiter design.
MAINTENANCE				
Installation time		< 2 hr	< 2 hr	< 2 hr
Subsequent		< 1 hr	< 1 hr	< 1 hr

Note :
Certain characteristics may vary depending on vehicle make and model.

*We recommend initial installation of Camso Track Systems be performed at an authorized dealer. Installation time may vary depending on vehicle make and model.

HOW TO MEASURE THE FIT WITH YOUR TRAILER

